

| NAME: | ADDRESS: | PH. No: | CIVI: |
|-------|----------|---------|-------|
| | | | |

Works Request

Toilet: **RIGHT** hand side when seated

Date:

Location: Main bathroom

Ensuite


Other:

Wall Type: Stud

Solid

Uncertain

Diagram: All measurements in mm. Drawing not to scale. **Photograph:** Taken with client's permission

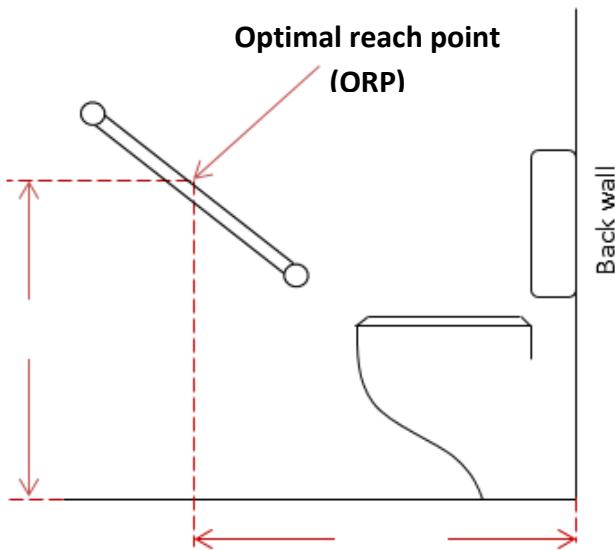

Specifications:

Supply and install a grab rail (on an angle) to the wall on the right hand side of toilet when seated.

Grab rail length to be a minimum of mm. Rail may be lengthened to fit stud work.

Rail to be positioned on 35-40° angle.

Ensure rail passes through client's optimal reach point.

Optimal reach point: mm above finished floor surface and mm out from back wall.

Other specifications (*Material, colour, diameter, client's weight if over 100kg*):

Grab rails must be secured to studs. If technical difficulties arise or the client wishes to alter specifications please contact the OT prior to commencing work.

Occupational Therapist, Scope Home Access